


POTOP

桌面流延机

- ◆ 一体式设计，体积小，精度高，性能优越
- ◆ 伺服电机控制，速度控制精度高
- ◆ 恒张力控制收卷，收卷效果更理想
- ◆ 模头翻转悬挂结构方便拆装螺杆，换网方便快捷

■ 主要技术指标

型 号	单 位	FDSI-20/28	FDSI-25/28
螺杆直径	mm	20	25
长径比	L/D	28	
螺杆转速	rpm	120	
模头宽度	mm	140	
制品宽度	mm	0-100	
制品厚度	mm	0.02-0.1	
温控精度	℃	± 1	
最高产量	Kg/h	2或5	
主电机功率	KW	3	3
额定功率	KW	约10	
整机重量	KG	约600	
长×宽×高	mm	2877×845×1687	

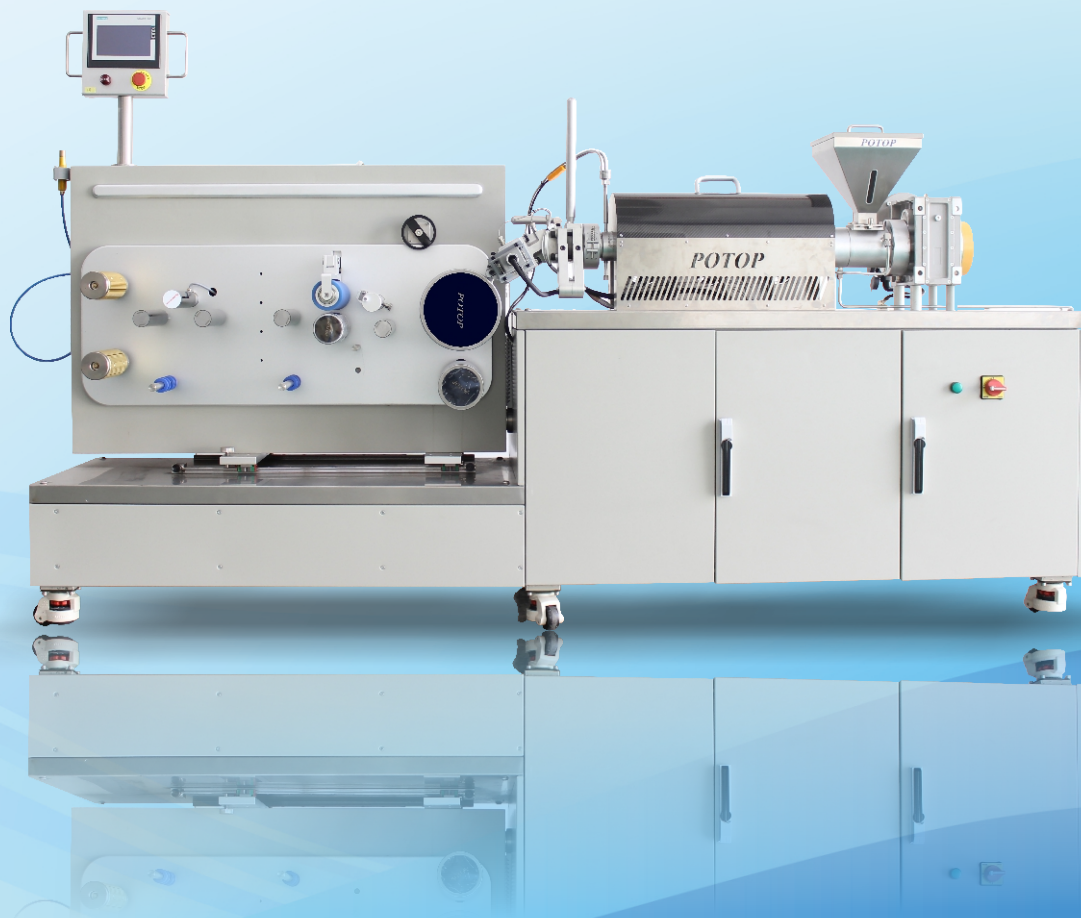

广州市普同实验分析仪器有限公司

Guangzhou POTOP Co., Ltd

华南理工大学聚合物新型成型装备国家工程研究中心番禺分中心
聚合物新型成型装备制造商

地址：广州市番禺区大龙街旧水坑村开发路3-40号

技术支持热线：+86 20 39283063 电话：+86 20 39283061 传真：+86 20 39283062 网址：www.potop.com.cn E-mail:info@potop.com.cn




POTOP

Desktop cast film machine

- ◆ One-piece design, small size, high precision and superior performance
- ◆ Servo motor control, high speed control accuracy
- ◆ Constant tension control winding, the winding effect is more ideal
- ◆ The flip-over suspension structure of the die head is convenient for disassembly and assembly of the screw, and it is convenient and quick to change the screen

■ Features

Item	Unit	FDSI-20/28	FDSI-25/28
Screw diameter	mm	20	25
Aspect ratio	L/D	28	
Screw speed	rpm	120	
Die width	mm	140	
Product width	mm	0-100	
Product thickness	mm	0.02-0.1	
Temperature control accuracy	℃	± 1	
Max. production	Kg/h	2 or 5	
Main motor power	KW	3	3
rated power	KW	Approx. 10	
Total Weight	KG	Approx. 600	
L × W × H	mm	2877 × 845 × 1687	

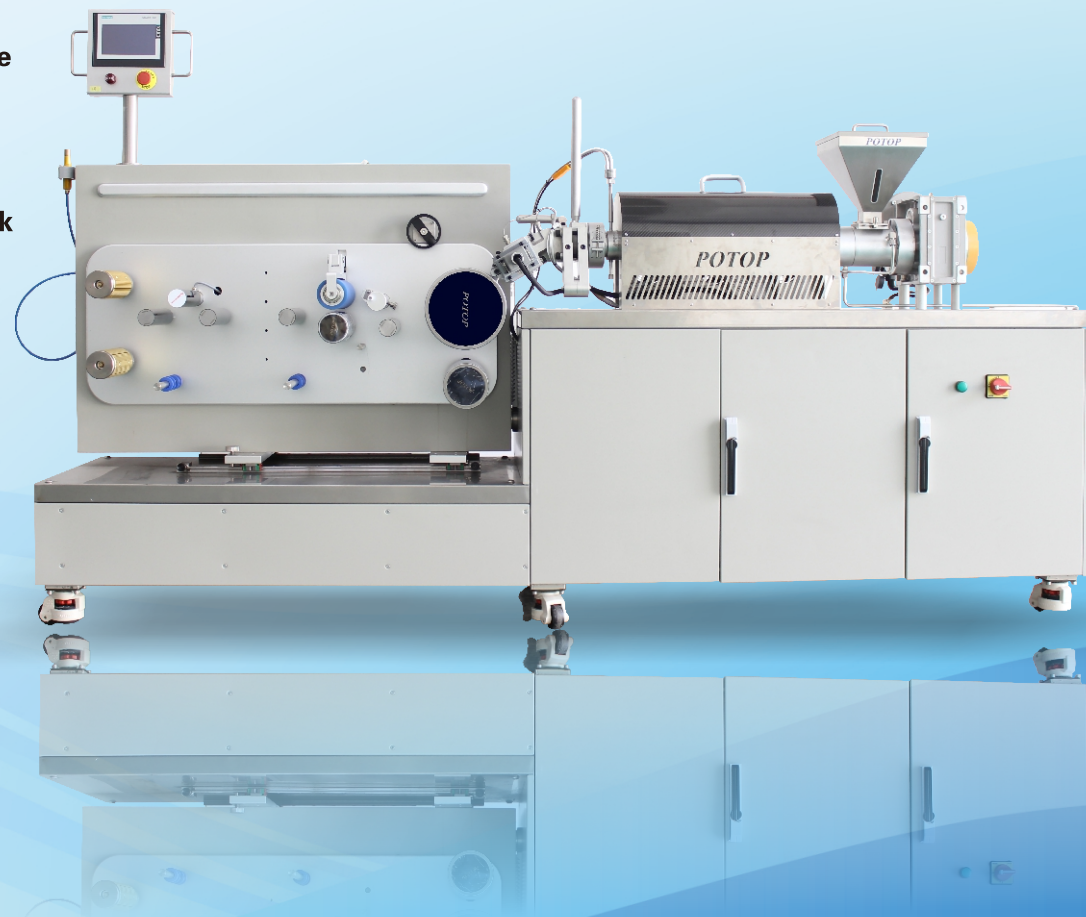

广州市普同实验分析仪器有限公司
Guangzhou POTOP Co., Ltd

NERC for new polymer forming equipment of SCUT
Manufacturer of new polymer forming equipment

Tel: +86 20 39283061 Fax: +86 20 39283062 web: www.potop.com.cn E-mail: info@potop.com.cn

